

RECHARGEABLE

INTRANT™ DUAL-LIGHT™ ANGLE LIGHT

NIGHTSTICK®
Life Depends on Light™

45°
EXCLUSIVE
DOWNWARD FLOODLIGHT

HEAD ROTATES 90°



Head rotates 90° – directing beam exactly where it's needed most



45° downward floodlight lights an 8 foot walking area



Easy-to-use with gloves, the large switches **independently control** separate LEDs



Heavy-duty, clip and V-ring **securely holds tight to gear** in any situation

GRAB-N-GO
CHARGING BASE



AVAILABLE IN MULTIPLE COLORS.



FLY STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	7h	15h	27h
	401m	250m	187m
	40256cd	15625cd	8750cd

200 LUMENS

1-800-233-2155 • 1-469-326-9400 • nightstick.com

© 2018 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates.

INTRANT™**DUAL-LIGHT™ ANGLE LIGHT****RECHARGEABLE****ITEM NUMBER/UPC**

XPR-5568RX (Red), 0 17398 80631 2
 XPR-5568GX (Green), 0 17398 80630 5

MARKET APPLICATIONS

Hazardous work environments, fire, rescue, industrial and automotive

CERTIFICATIONS

- CE, cULus, Atex, IECEx, NFPA

CASE MATERIAL

- Glass filled nylon polymer

LUMENS/RUNTIME**FLASHLIGHT**

- HIGH: 200L, 7 hrs. runtime
- MEDIUM: 110L, 15 hrs. runtime
- LOW: 60L, 27 hrs. runtime
- STROBE

FLOODLIGHT

- HIGH: 100L, 7 hrs. runtime
- MEDIUM: 40L, 15 hrs. runtime
- SURVIVAL: 20L, 27 hrs. runtime

DUAL-LIGHT

- 205L, 7 hrs. runtime

CANDELA**FLASHLIGHT**

- HIGH: 40,256
- MEDIUM: 15,625
- LOW: 8,750

BEAM DISTANCE**FLASHLIGHT**

- HIGH: 401m
- MEDIUM: 250m
- LOW: 187m

WATER RATING

- IP-67 (dustproof and waterproof)

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 6.6 in (168mm)
- WIDTH: 2.6 in (66mm)
- DEPTH: 2.6 in (66mm)
- BEZEL DIAMETER: 2.1 in (53mm)
- WEIGHT: 10.6 oz (301g)(with batteries)

BATTERY

- Rechargeable Li-ion battery pack
- AA Battery carrier (batteries not included)

WARRANTY


- Limited lifetime warranty

WHAT'S INCLUDED

- Angle light
- Rechargeable Li-ion battery pack
- AA battery carrier
- Snap-in rapid charger
- AC & DC power supplies
- Instruction manual

FL1 STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	7h	15h	27h
	401m	250m	187m
	40256cd	15625cd	8750cd
	2m		
	1m		

XPR-5568 PERFORMANCE CURVE

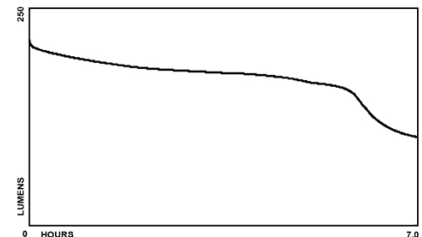

Bayco Products, Inc. XPR-5568
 640 S. Sanden Blvd., Wylie, TX 75098

Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

For use with Bayco Li-ion Battery Pack 5568-BATT or 5568-CARRIER with 3 AA Energizer Type EN91 or E91 batteries only



E 114304
 ID 4003544

ELECTRICAL SAFETY
 INTRINSICALLY SAFE
 SECURITE INTRINSEQUE

CE 0359

Control Drawing: 5568-CERT-DWG1-03

CLASS I DIV 1 GRPS A-D T3
 CLASS II & III DIV1 GRPS E-G T135°C
 CLASS I ZONE 0 AEx ia IIC T3 Ga

Ⓢ I M1 Ex ia op is I Ma
 Ⓢ II 1 G Ex ia op is IIC T3 Ga

Ex ia op is I Ma
 Ex ia op is IIC T3 Ga
 DEMKO 17 ATEX 1927

IECEx UL 17.0082
 -20°C ≤ Tamb ≤ +40°C
 1.5V/Cell Alkaline

3.7V/Cell Li-ion
 IP-67
 Um: 10V

CERTIFIED

NFPA

AVAILABLE IN MULTIPLE COLORS.

