



TECHNICAL DATA SHEET

NEW

Lifeboat Light
SL-400

Daniamant design and manufacture all of our products in line with the relevant worldwide approvals, technical specifications, current legislation and International directives.

Our mission is to achieve World class performance through partnerships with our suppliers, customers and employees, providing products and services that enhance the safety and security of our customers.

Daniamant products cover ten key areas:

- Lifejacket Lights
- Liferaft Lights
- Lifebuoy Lights
- Intrinsically Safe Lights
 - Special Lights
 - LED Flares
- Bridge Navigational Watch Alarm System (BNWAS)
 - Salinometers
- Electronic Inclinator
- Agency for a range of world-renowned safety product brands (supplied to the Danish market)

Further Information

For further information on our products, please see our website: www.daniamant.com

MODEL	SL-400
Part number	24-001A
Plastic Colour	Yellow
Light - Output	Minimum 4,3 cd
Light - Duration	5 years
Light - Type	Robust
Flash	50-70 flash/min
Material	ABS
Storage Temperature	-30 C to +65 C
Operating Temperature	-30 C to +65 C
Weight - Nominal	0.350 kg
Power	10-30 VDC
Activation	External power
Approvals	In compliance with SOLAS CH III Life-Saving Appliances
- Classification Societies	
Approvals - Country	
	See our website for full list of Country approvals

Transport Specification

The light is not subject to any transport regulations.

Accessories

Cable length can vary on request, please contact Daniamant for details.

Packing Specification

To minimize shipping costs, all Lifeboat Lights are packed and supplied in boxes of 10 off.

The dimensions are:

Box of 10 off : 535 x 220 x 190 mm

Approximate packed weights are:

Box of 10 off : 5.2 kg

Daniamant Ltd
Unit 3, The Admiral Park
Airport Service Road
Portsmouth, PO3 5RQ
United Kingdom

Tel +44 23 92 67 51 00
Fax +44 23 92 67 51 01
sales@daniamant.com


Daniamant ApS
Industrivej 24C
3550 Slangerup
Denmark

Tel +45 47 37 38 00
Fax +45 47 37 38 09
orders@daniamant.com

Daniamant Electronics A/S
Industrivej 24C
3550 Slangerup
Denmark

Tel +45 47 37 38 00
Fax +45 47 37 38 09
info@daniamant.com

Outline

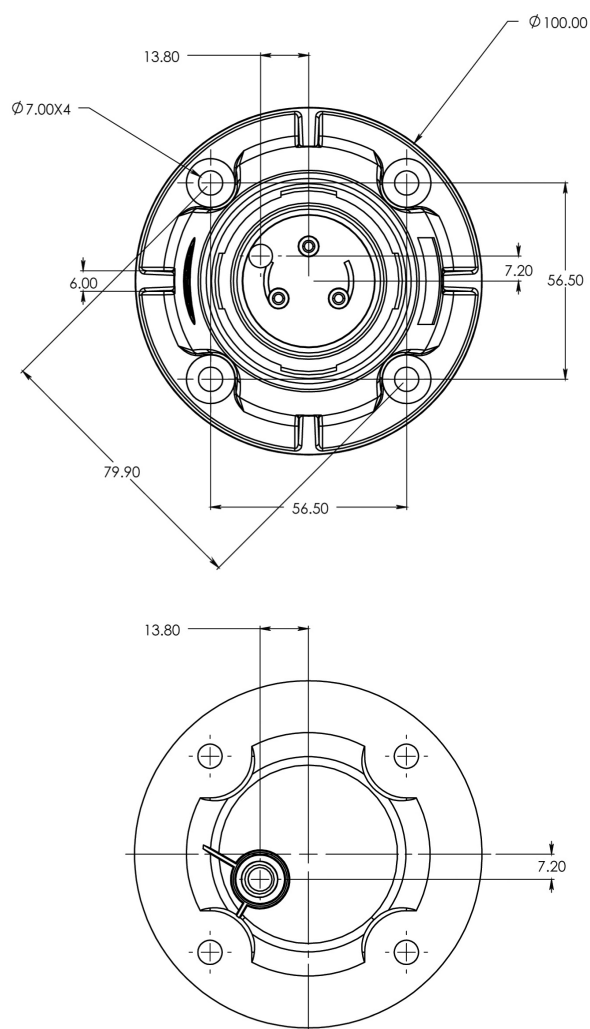

Installation

Use stainless steel screws, mounting must be on a flat surface to prevent water-ingress. Connect the cable to the external power-supply (12-24 VDC), observe correct polarity.