

NSR

GMDSS

NAS-1000

AIS-SART



NAS-1000 AIS-SART



NAS-1000 AIS-SART (GMDSS)

NAS-1000 AIS-SART is designed to use for emergency purpose on lifecraft. According to the relative IMO rule, either AIS-SART or traditional RADAR-SART (Search and Rescue Transponder) can be accepted as "SAR LOCATING DEVICE" to be a member of onboard GMDSS family from January 1st, 2010.

Compared to RADAR-SART, AIS-SART has advantage in some aspects, such as farther-reach transmission and less affect from sea conditions. With more and more vessels to be fitted with AIS, AIS-SART will become more effective and useful in SAR operations.

NAS-1000 is designed to transmit a serial of messages on two AIS channels periodically. With unique and special MMSI pre-configured, alerts from AIS-SART can be easily recognized and read, which is sent both in position report and safety message.

NAS-1000 adopts low consumption devices to ensure the product to continuously operate more than 96 hours.

NAS-1000 conforms to the latest rules including IMO MSC 246 (83) and IEC 61097-14.

SPECIFICATIONS

• TECHNICAL SPECIFICATIONS

TX Channel:	AIS 1 (CH2087) , AIS 2 (CH2088)
FREQ Tolerance:	≤0.5kHz
Communication Range:	≥5 nm
Operating Hours:	≥96 hours
GPS Fixing Time:	≤1 minute

• BATTERY REQUIREMENTS

Battery Voltage:	DC 7.2V
Storage Temp:	-30℃ ~ +70℃
Storage Time:	5 YEARS

• WORKING ENVIRONMENTS

Operation Temp:	-20℃ ~ +55℃
Floating Type:	FLOATABLE

• DIMENSION & WEIGHT

Dimension:	95 (D) × 377 (L) mm
Weight:	abt 900g


EQUIPMENT LIST

• STANDARD

- TRANSMITTER (NAS-1000)	1 set
- INSTALLATION BRACKET	1 pc
- TELE-POLE (1.5m)	1 pc
- INSTALLATION MATERIALS	1 set



SIZE DIMENSION

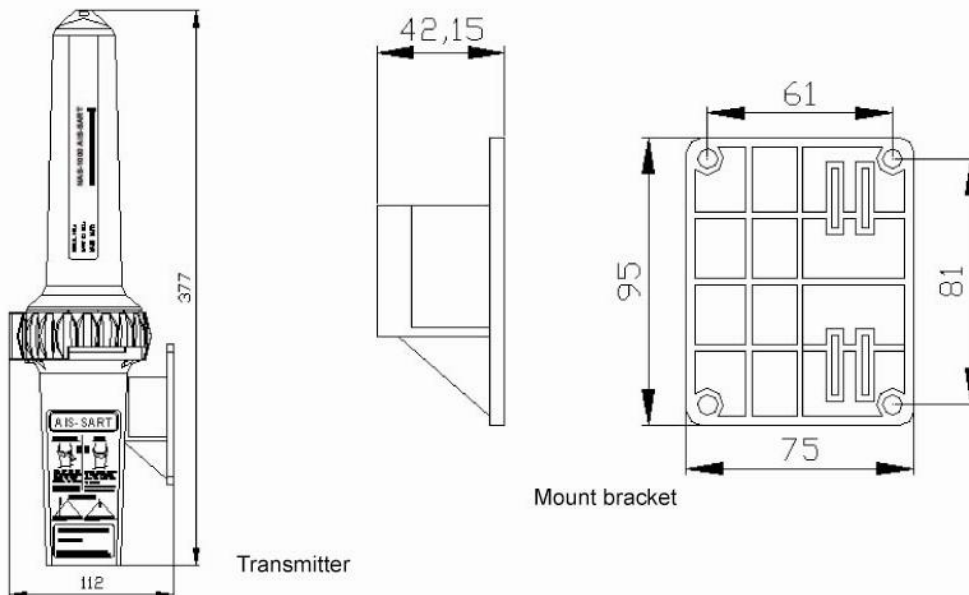

Manufacturer:

NSR

NEW SUNRISE CO., LTD.
www.nsrmarine.com



※ Specifications subject to change without notice.

Distributor: