

FOAM WHEELED 150 LT FIRE EXTINGUISHER

MODEL F135B

With CO₂ cartridge


FIRE CLASSES A-B

TECHNICAL SPECIFICATION

Total weight	kg 240
Extinguishing agent	AFFF 6% foam
Propelling agent	CO ₂
Charge	135 lts
Average throw	10 meters
Discharge time	150 seconds

Painting cycle

- Deep sandblasting
- Epoxy powder painting 80 µm
- Colour : Cylinder Red Ral 3000

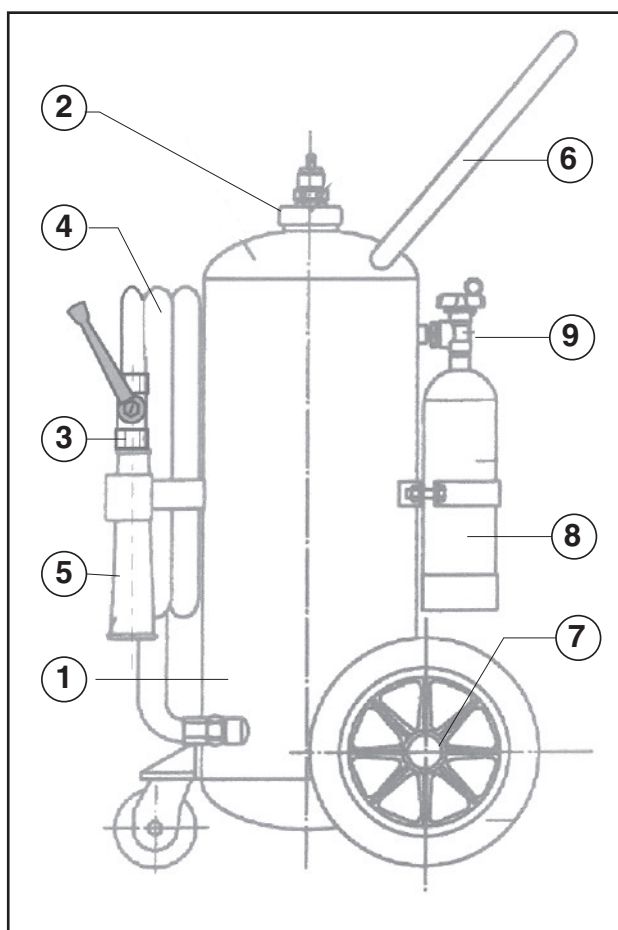

1 VESSEL

- Diameter 490 mm
- Material Steel Fe P11
- Work pressure bar 14 at +20°C
- Test pressure bar 26 at +20°C
- Burst pressure bar 70 at +20°C

2 BRASS CAP Ø 2"

- Complete with: Spring safety valve set at bar 22 ± 2

- Material Brass

3 VALVE

- Interception valve Brass

4 HOSE

- Length 5 meter
- Burst pressure 60 bar
- Material Reinforced rubber

5 FOAM NOZZLE

- Material Brass - aluminium

6 TROLLEY

- Material Steel Fe 37

7 WHEELS

- Diameter 400 mm
- Material Reinforced plastic covered in rubber

8 CO₂ CARTRIDGE

- Material Steal 34 Cr Mo4
- Capacity 5 kg CO₂ (7,5 lts)

9 HANDWHEEL VALVE

- Complete with safety-disc set at 185 ± 15 bar
- Valve body material Brass

M.B. SRL

20025 LEGNANO (MI) - Via Don Milani, 16/18
 Tel. ++ 39 0331 46.52.84
 Fax. ++ 39 0331 46.52.58
 E-mail: info@mb-extinguisher.com
 Internet: //www.mb-extinguisher.com



ASSOCIATA
ANIMA



UMAN
 UNIONE COSTRUTTORI
 MATERIALI ANTINCENDIO



ASSOCIATA AIAS
 ASSOCIAZIONE ITALIANA FRA ADDETTI
 ALLA SICUREZZA

ASSOCIATA UNI
 ENTE NAZIONALE ITALIANO
 DI UNIFICAZIONE

EXTINGUISHER Model **F135B**

TECHNICAL SPECIFICATION N° **EX 0801**

Pag. 1/1