


F50G

A - IVB

WHEELED STORED PRESSURE TROLLEY 50 LT FOAM FIRE EXTINGUISHER
EXTINCTEUR SUR ROUES - 50 LT MOUSSE À PRESSION PERMANENTE



STAINLESS
STEEL
AISI 304L

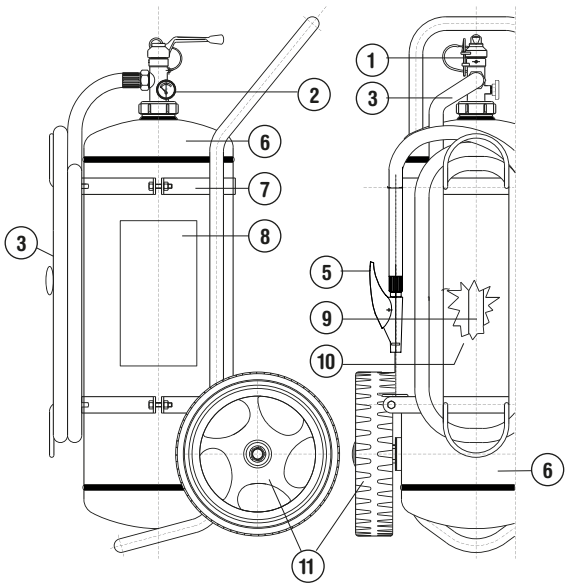

PART LIST - LISTE DES COMPOSANTS

POS.	DESCRIPTION	Q.TY / Q.TÉ	ART.	CODE
1	Complete Lever Valve – <i>Vanne à Levier Complète</i>	1	280	VCA
2	Man. Ø 23 mm.	1	391	M35EN
3	Hose – <i>Tuyau</i>	1	486	MCBE
5	Discharge Nozzle – <i>Diffuseur</i>	1	361	PBR
6	Cylinder – <i>Cylindre</i>	1	3615	PBR+UPBR
7	Trolley – <i>Chariot</i>	1	...	...
8	Label – <i>Étiquette</i>	1	626	E
9	Diptube – <i>Tube Plongeur</i>	1	461	TP50
10	Water + <i>Additive</i> AFFF	50 LT	-	-
11	Wheels – <i>Roues</i>	2	510	RU30/50

(*) In case of use of mastic and / or similar products the declared values for the maximum torque strength between vessel and valve must be decreased of 30/40%.

The approved fire extinguisher must be serviced only with original parts in order to allow maintaining the conformity with the approved prototype.
The use of not original parts makes the homologation invalid.

(*) En cas d'utilisation de mastic et / ou produits similaires, la couple maxime de serrage entre réservoir et vanne doit être diminuée de 30/40% par rapport aux valeurs déclarées.
L'extincteur d'incendie approuvé doit être entretenu uniquement avec des replacements originales afin de permettre de maintenir la conformité au modèle approuvé.
L'utilisation de pièces pas originaux rend l'homologation invalide.

MORE INFORMATION - PLUS D'INFORMATIONS

WIDTH - **LARGUEUR**
HEIGHT - **HAUTEUR**
WEIGHT - **POIDS**

500 mm
1100 mm
79,00 kg



PACKAGING : 4 PIECES FOR PALLET
STANDARD PALLET: 100 x 120 x 150 - 330 KG
EMBALLAGE : 4 PIÈCES PAR PALETTE
PALETTE STANDARD: 100 x 120 x 150 - 330 KG